


KOHLTECH

Solutions For Every Industry & Every Build

DVR EasyCheck Device

KOHLTECH
VIDEO MANAGEMENT CENTER

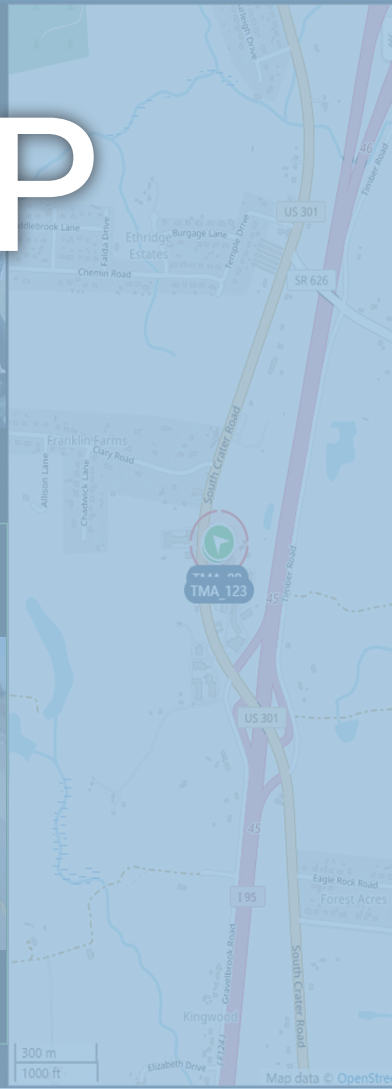

- Hardware and Connection
- App Navigation
- WiFi Setup & Connection
- Support Contact Steps

- Vehicle Number
- Device ID
- Group
- Type
- Longitude
- Latitude
- Speed

Connecting your EZ Check Device

Resources required to check DVR with EZ Check:

- i. EasyCheck device
- ii. Smart phone or tablet
- iii. EasyCheck mobile app (Search EasyCheck in your devices mobile app store)

1. To connect your EasyCheck device to your DVR pull the USB pigtail pictured in image 1B. out from the side of the device.



2. Plug the USB pigtail into the USB port on the front of the DVR as pictured in image 2A.



3. Once connected you will see the blue power light illuminate and a wifi network will become available for wireless connection via smart phone.

4. Open your smart device and navigate to the device wifi menu and select the wifi network.




5. Please note that once you select the wifi created by the EasyCheck device it may notify you that there is no Internet connection or that the connection is not secure. Ensure you tap Keep Using Wifi(These notices are normal and you may proceed with the next steps.)

6. Once you have selected the wifi signal, navigate to the app on your smart device (app icon pictured in image 6A.)

7. Tap the icon and open up the EasyCheck app.

8. Once the app loads you will see a screen similar to the one pictured in image 8A.

8A.

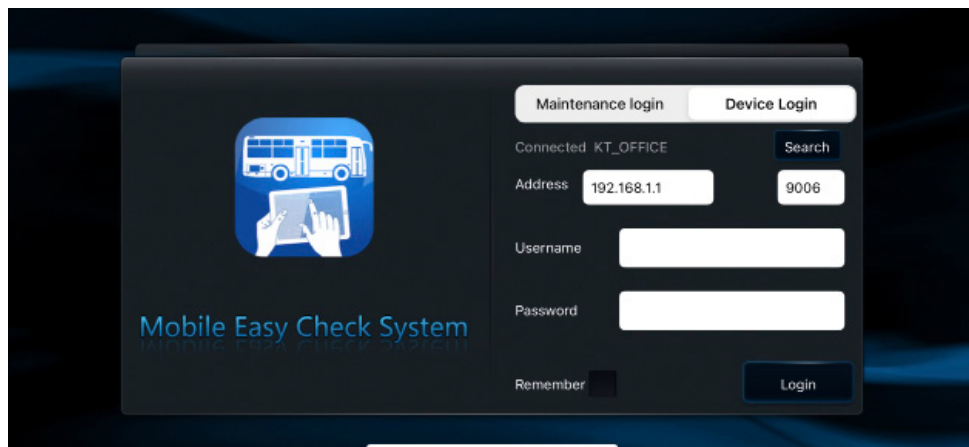


9. Login using the below credentials:


Username - admin

Password - 222777


10. Once the app loads you will see a screen similar to the one pictured in image 10A.

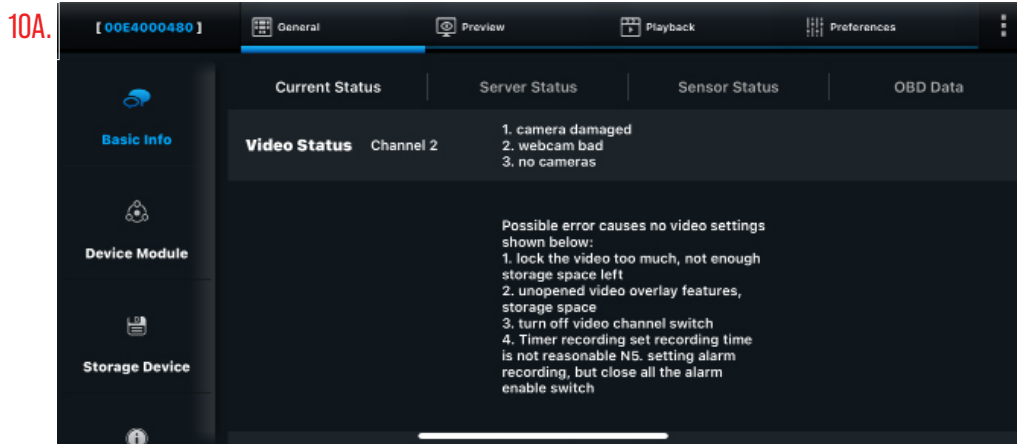


11. Select preferences as highlighted below in image 11A.

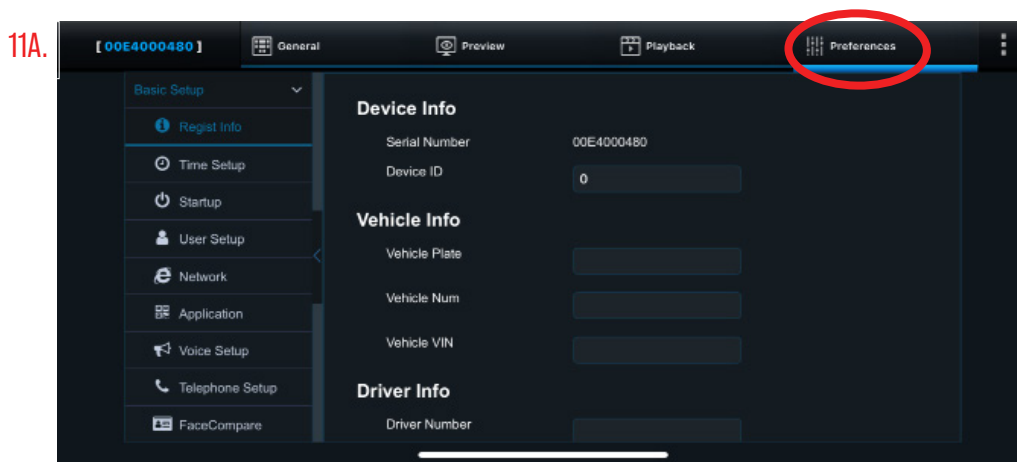


12. Once selected, tap network as highlighted below in image 12A.

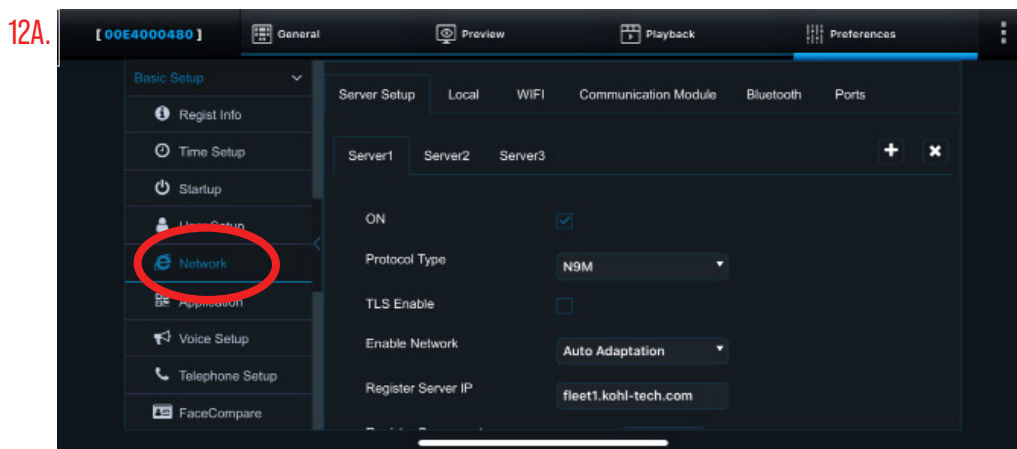


13. From there you will need select the WIFI tab as highlighted below.

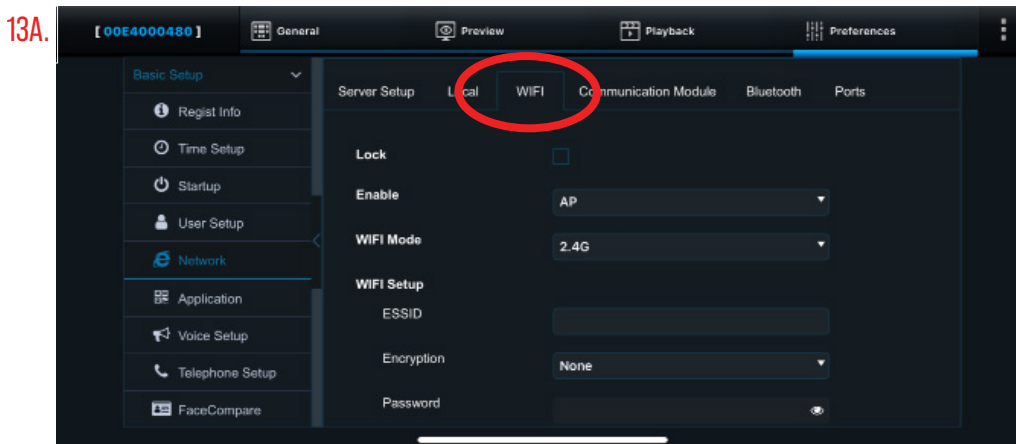

14. After wifi has been selected use the below drop down and select client. Once that step has been completed enter the ESSID and password applicable for your company.

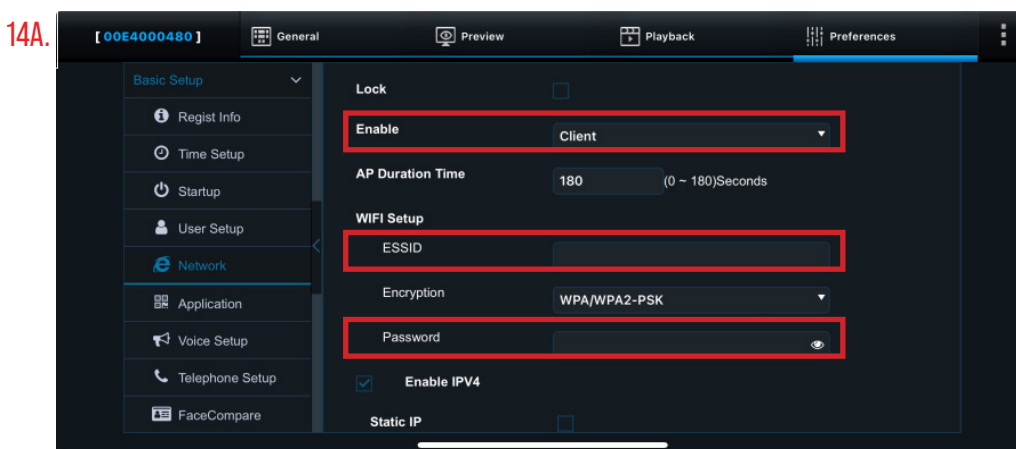

15. Once you have entered the data previously outlined be sure to save as pictured in image 15A.

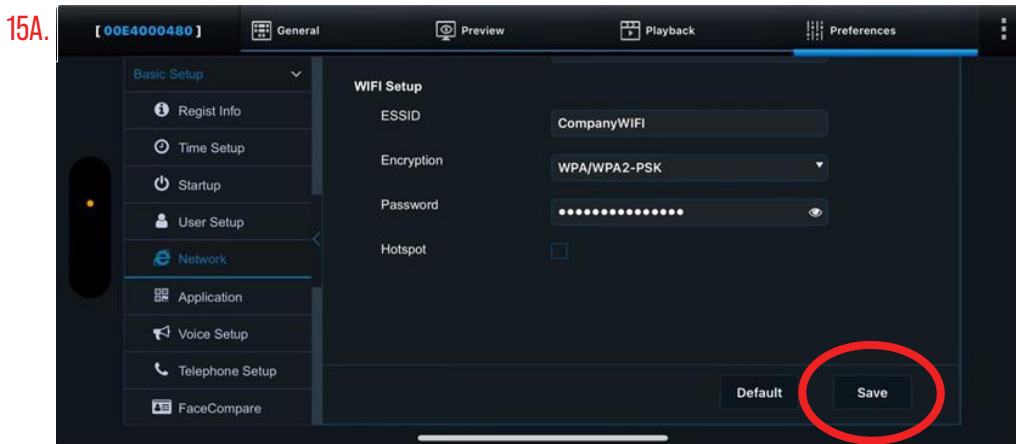

Status Light Identification



Normal operation (without network connection) - Blue PWR and Green REC



Normal operation with KOHLTECH Server connection - Blue PWR, Green REC and flashing Green NET light



A orange ERR and red ALM light indicates a missing or damaged SD card and a disconnected or damaged camera.

Technical Support Contact Guide

For further assistance please contact KOHLTECH at:

support@kohl-tech.com

877.708.7803

www.kohltechnology.com/contact